


Specifications			
IO-Link Signal Beacons NE-IL			
Model	NE-ILNB-M With buzzer	NE-ILTB-M With buzzer and touch sensor	NE-ILXB-M With buzzer, touch sensor, and digital / analog input
Size	φ56mm		
Rated Voltage	24V DC		
Mounting Location / Mounting Direction	Indoors, Upright		
Protection Rating	IP65 NEMA TYPE 4X, 13		
LED Color	Multi-color (Red, Amber, Green, Blue, White, Purple, Cyan)		
LED Unit Modes	Continuous / Flashing		
Sound Pressure	Typ. 88 dB [8 sound types (Selectable)]		
Conformity Standards	●EMC Directive (EN 61000-6-4, EN 61000-6-2) ●RoHS Directive (EN 50581) ●UL 508, CSA-C22.2 No. 14 ●FCC Part 15 Subpart B Class A ●KC (KN 61000-6-4, KN 61000-6-2)		
Connection	M12 connector 5 pins A code		M12 connector 8 pins A code

IO-Link Signal Tower LR6-IL			
Model	LR6-3ILWMNW-RYG	LR6-ILWMNW	LR6-ILWCNW
	Pre-assembled Model (Direct mount)	Body Unit (Direct mount)	Body Unit (1/2" NPT pipe or direct mount)
Size	φ60mm		
Rated Voltage	24V DC		
Mounting Location / Mounting Direction	Indoors, Upright		
Tier	LED Unit: Max. 5 tiers and one buzzer unit		
LED Color	Red / Amber / Green (Blue and White LED units also available)	N/A - LED units are sold separately	
LED Unit Modes	Continuous / Flashing		
Buzzer Sound Pressure	Typ. 84 dB (Use LR6-BW)		
Buzzer Sound Selection	4 sound types (Selectable) (Use LR6-BW)		
Protection Rating	IP65 NEMA TYPE 4X, 13		
Conformity Standards	●EMC Directive (EN 61000-6-4, EN 61000-6-2) ●RoHS Directive (EN 50581) ●UL 508, CSA-C22.2 No. 14 ● FCC Part 15 Subpart B Class A ● KC (KN 61000-6-4, KN 61000-6-2)		
Connection	M12 connector 5 pins A code		

How to Order

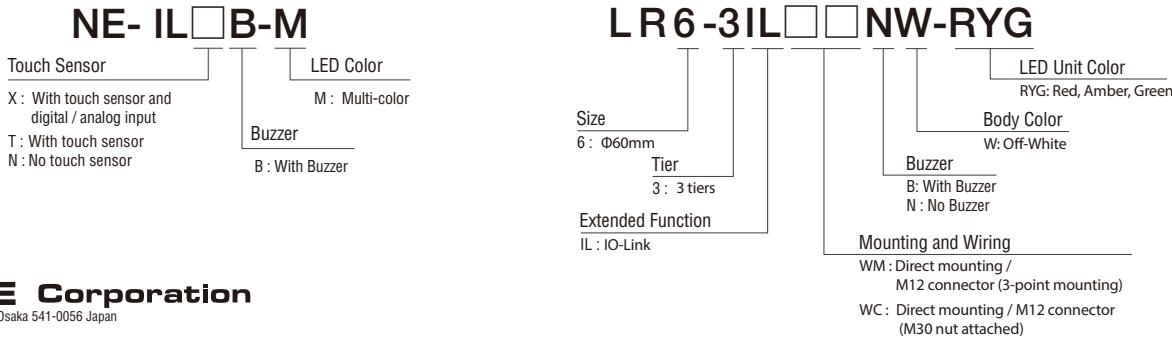

PATLITE Corporation

4-1-3, Kyutaromachi, Chuo-ku, Osaka 541-0056 Japan
International Sales Division
TEL:+81-6-7711-8953 FAX:+81-6-7711-8961 E-mail: overseas@patlite.co.jp

PATLITE (U.S.A.) Corporation

20130 S. Western Ave. Torrance, CA 90501, U.S.A.
TEL:+1-310-328-3222 FAX:+1-310-328-2676 E-mail: sales@patlite.com

PATLITE (SINGAPORE) PTE LTD

No 2 Leng Kee Road, #05-01 Thye Hong Centre, Singapore 159086
TEL:+65-6226-1111 FAX:+65-6324-1411 E-mail: sales@patlite.com.sg

PATLITE (CHINA) Corporation

Room 1102-1103, No.55, Lane 777, Guangzhong Road (West), Jing an District, Shanghai, China 200072
TEL:+86-21-6630-8969 FAX:+86-21-6630-8938 E-mail: sales@patlite.cn

PATLITE Europe GmbH

Am Soeldnermoos 8, D-85399 Hallbergmoos, Germany
TEL:+49-811-9981-9770-0 FAX:+49-811-9981-9770-90 E-mail: info@patlite.eu

PATLITE KOREA CO., LTD.

A-2603, Daesung D-POLIS, 606, Seobusaet-gil, Geumcheon-gu, Seoul, 08504, Korea
TEL:+82-2-523-6636 FAX:+82-2-861-9919 E-mail: sales@patlite.co.kr

PATLITE TAIWAN CO., LTD.

2F-1, No.215, Sec. 2, Chengde Rd., Datong Dist., Taipei City 10364, Taiwan (R.O.C.)
TEL:+886-2-2555-1611 FAX:+886-2-2555-1621 E-mail: info@patlite.tw

PATLITE (THAILAND) CO., LTD.

Olympia Thai Tower, 15th Floor 444 Ratchadapisek Road Samsenrok, Huay Kwang Bangkok 10310, Thailand
TEL:+66-2-541-5431 FAX:+66-2-541-5429 E-mail: sales_150716@patlite.co.th

PATLITE MEXICO S.A. de C.V.

Plaza de La Paz No. 102, int. 712 Guanajuato Puerto Interior, Silao, Gto, C.P.36275, Mexico
TEL:+52-472-748-9124 E-mail: ventas@patlite.com.mx

CAUTION

To ensure correct use of these products, read the "Instruction Manual" prior to use. Failure to follow all safeguards can result in fire, electric shock, or other accidents. Specifications are subject to change without notice.

0-AI06 EN 1906 A

PATLITE®


IO-Link Product Catalog

IO-Link




IO-Link is an open-standard protocol that enables bi-directional data communication between devices and the master. Incorporate PATLITE signal devices into IO-Link to facilitate and enhance manufacturing processes.

Solution 01 Automotive Production Line

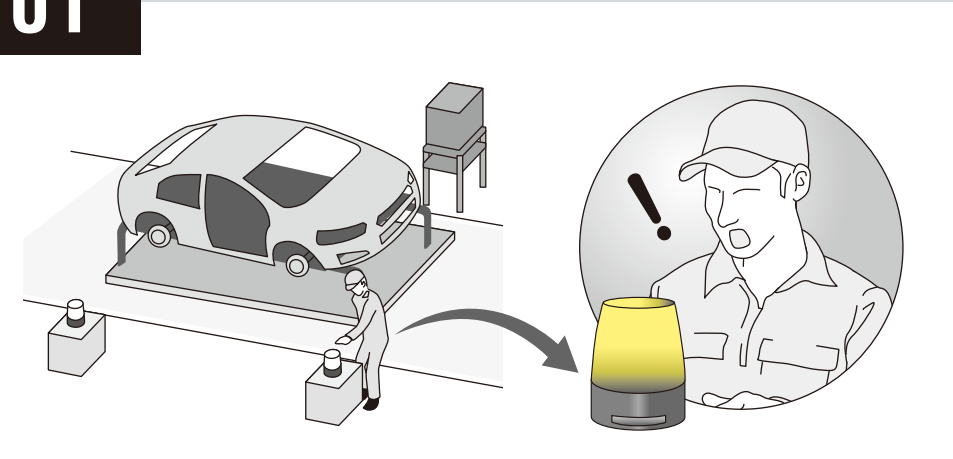


Call for parts and notify managers of issues.

Solution 03 Various Industrial Equipment

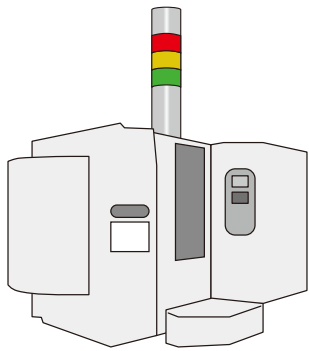


Reduce wiring costs and device setup time.

Solution 02 Food and Beverage Production Line

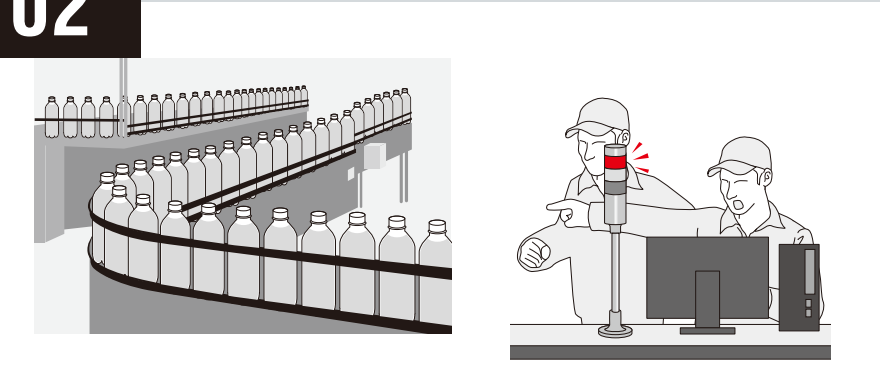

Acquire real-time equipment status and collect operational metrics.

Solution 04 Devices Not Compatible with IO-Link

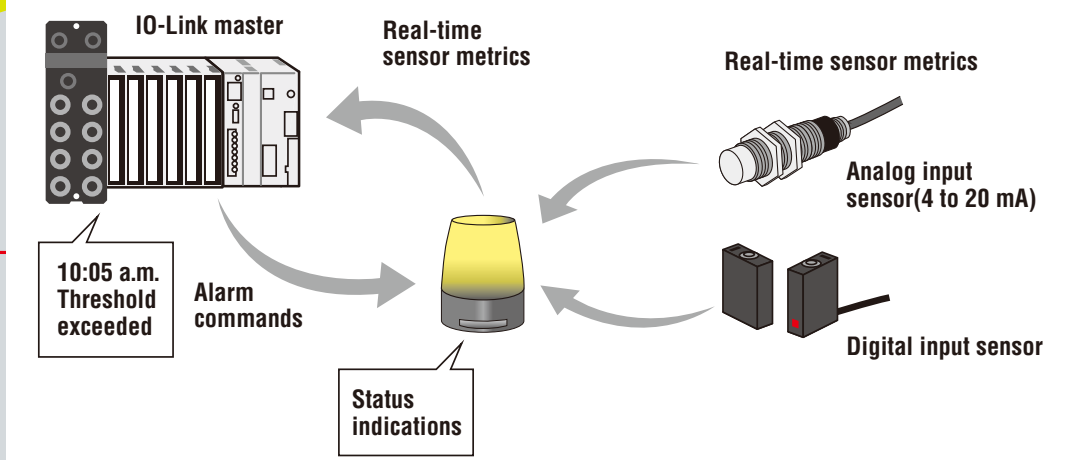


Enables integration of non-compatible devices into IO-Link.

Solution 01

Automotive Production Line

Call for parts or request assistance with a single touch

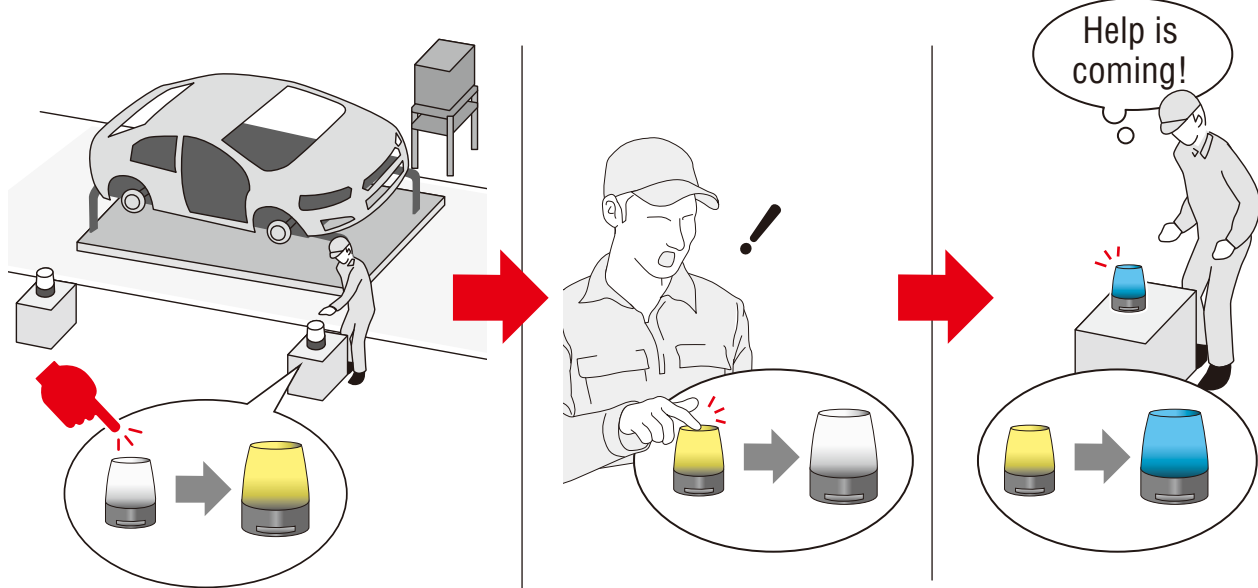


When an issue arises, the personnel at the production site touches the NE-IL to activate the visual and audible alarms of the NE-IL at the manager's site.

The manager instantly notices the alarms, and determines where and what the issue is according to the illuminated color. The manager can touch the NE-IL to send notification back to the production site to indicate that help is on the way.

Solution 02

Food and Beverage Production Line

Anticipate issues and enhance predictive maintenance

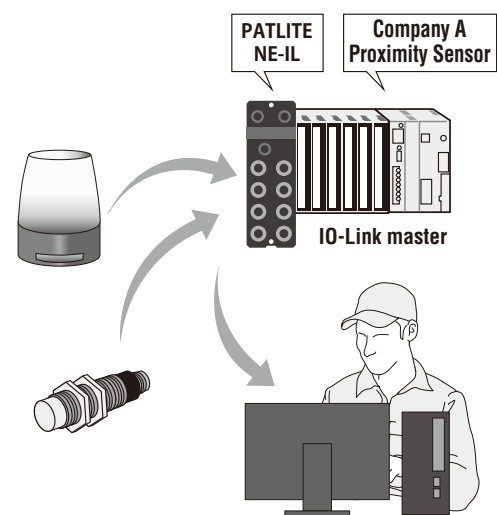

The IO-Link master acquires real-time operational data of the sensors and other devices that are connected. This data can be monitored remotely, and collected for further analysis.




When device abnormalities such as water or dust obstruction is detected, the IO-Link master sends commands to the LR6-IL Signal Tower to activate its visual and audible alarms to indicate the specific problem. Identify device issues before it happens to avoid equipment malfunctions and halts in production.

Solution 03

Various Industrial Equipment

Standardizing with IO-Link reduces overall costs


The NE-IL Signal Beacons and LR6-IL Signal Towers can be connected to IO-Link with a single M12 cable. This minimizes wiring requirements, which reduces labor and costs. In addition, IO-Link allows for easy replacement of old or damaged devices, as it automatically imports previous settings to the new device.



Solution 04

Devices Not Compatible with IO-Link


Devices Not Compatible with IO-Link

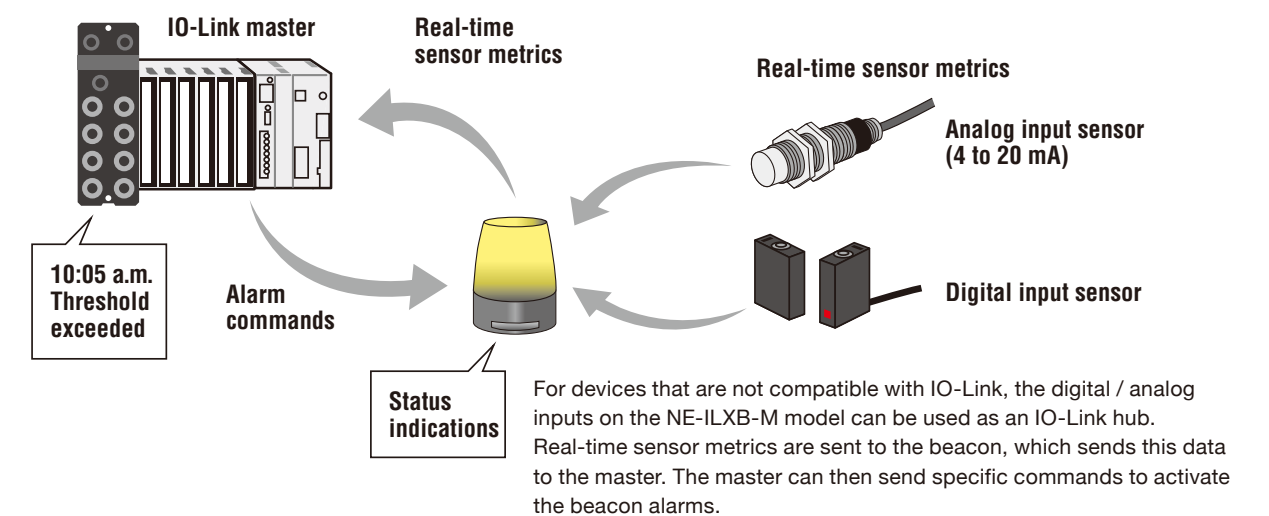

For devices that are not compatible with IO-Link, the digital / analog inputs on the NE-ILXB-M model can be used as an IO-Link hub. Real-time sensor metrics are sent to the beacon, which sends this data to the master. The master can then send specific commands to activate the beacon alarms.

Example of Use

Achieve timely responses to issues

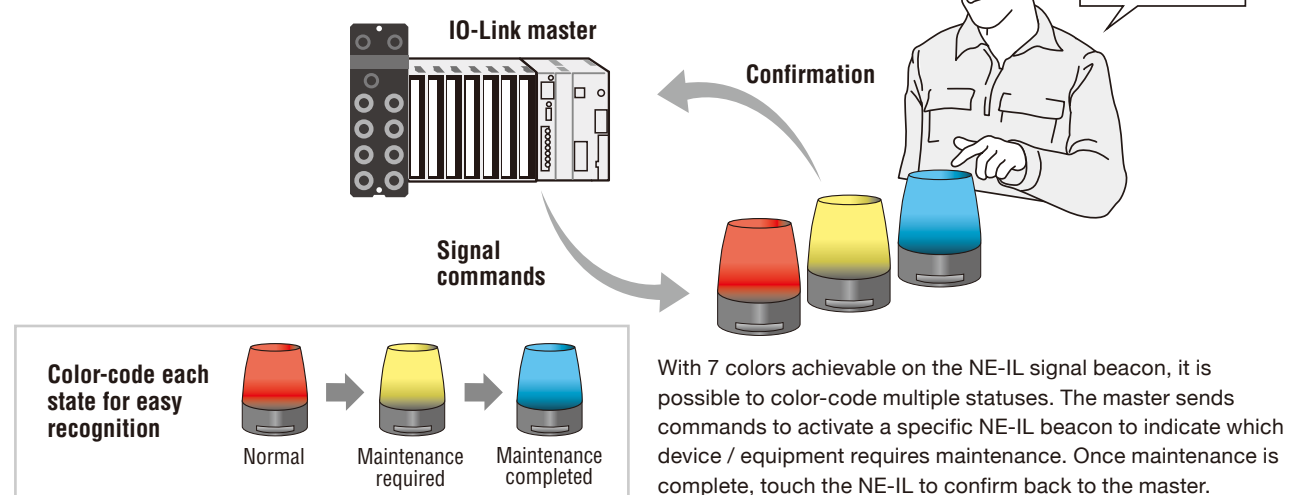

Color-code each state for easy recognition



With 7 colors achievable on the NE-IL signal beacon, it is possible to color-code multiple statuses. The master sends commands to activate a specific NE-IL beacon to indicate which device / equipment requires maintenance. Once maintenance is complete, touch the NE-IL to confirm back to the master.

Features



7 colors in 1 light



2-way communication (commands from the master and indications via touch sensor)



Buzzer can be sounded in combination with continuous/flashing light and touch sensor



Digital/analog input to connect devices that are not compatible with IO-Link (XB model only)

Durable and Versatile



Touch sensor is able to detect bare or gloved hands - even when wet



High protection rating for operation in harsh environments (IP65)




Compatible with M12 connector for easy connection


Other Application Examples



Pick-to-light



Status indications at production cells



Real-time equipment status monitoring

Options

Upper Bracket

NE-001D



ex.



Wall Mount Bracket

NE-002D



1/2" NPT Bracket

SZP-092D



Features



Pre-assembled model



Body unit (Direct mount)



Body unit (1/2" NPT pipe or direct mount)



M12 connector for easy connection



Select from a variety of LED colors and buzzer sounds

Compatible Units

Solid Color

LR6-E-R/Y/G/B/C



Clear Globe

LR6-E-RZ/YZ/GZ/BZ




Buzzer Unit

LR6-BW



Multi-Color

LR6-E-MZ

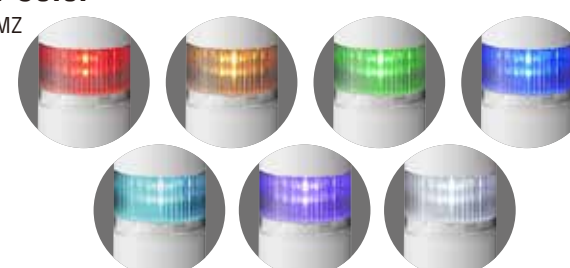

Wireless Data Acquisition System Transmitter

WDT-6LR-Z2



Cost-effective, retrofit solution for select PATLITE Signal Towers enabling wireless data acquisition and real-time monitoring.

Options

Wall Mount Bracket

SZK-003W



Pole Bracket

SZ-016A



Upper Bracket

SZP-004W



SZ-010




Pole

POLE-800A21



POLE-300A21



POLE-100A21

