

# PATLITE®

# PATLITE®

New Frontiers in Safety, Security and Comfort.

## Explosion Protection & Harsh Environment

<http://www.patlite.com> e-mail:overseas@patlite.co.jp

### PATLITE Corporation

8-8, Matsuyamachi, Chuo-ku, Osaka, Japan 542-0067  
International Division, Sales and Marketing Department  
TEL: +81-6-6763-8220 FAX: +81-6-6763-8221

**PATLITE (U.S.A.) Corporation** E-mail:sales@patlite.com  
20130 S. Western Ave. Torrance, CA90501, U.S.A.  
TEL: +1-310-328-3222 FAX: +1-310-328-2676

**PATLITE (SINGAPORE) PTE LTD** E-mail:sales@patlite.com.sg  
No.2 Leng Kee Road, #05-01 Thye Hong Centre, Singapore 159086  
TEL: +65-6226-1111 FAX: +65-6324-1411

**PATLITE (CHINA) Corporation** E-mail:sales@patlite.cn  
Room 512, Jufeng Business Building, No.697-3 Lingshi Road, Shanghai China 200072  
TEL: +86-21-6630-8969 FAX: +86-21-6630-8938

**PATLITE Europe GmbH** E-mail:info@patlite.eu  
Am Soeldnermoos 8, D-85399 Hallbergmoos, Germany  
TEL:+49-811 9981 9770-0 FAX:+49-811 9981 9770-9

**PATLITE KOREA CO., LTD.** E-mail : sales@patlite.co.kr  
A-2603, Daesung D-POLIS, 543-1 Gasan-dong, Geumcheon-gu, Seoul, 153-803  
TEL.+82-2-523-6636 FAX.+82-2-861-9919

**PATLITE Japan Representative Office Taiwan**  
7F. No. 91, Huayin St, Datong District Taipei, Taiwan R.O.C  
TEL.+886-2-2555-1611 FAX.+886-2-2555-1621

**P.T. PATLITE INDONESIA (FACTORY)**  
LOT 321 Batamindo Industrial Park, Jalan Beringin Mukakuning, Batam 29433 Indonesia  
TEL: +62-770-61-1123 FAX: +62-770-61-2444



To ensure correct use of these products, read the Instruction Manual prior to use.  
Failure to follow all safeguards can result in fire, electric shock, or other accidents.  
Specifications are subject to change without notice.



ISO9001:2008 Certified  
ISO14001:2004 Certified  
Headquarters / Sanda Plant



PT. PATLITE INDONESIA



PATLITE ECO PROJECT

For the benefit of mankind and the earth, PATLITE is committed to developing environmentally friendly products.



Sanda Plant



Headquarters



PATLITE (U.S.A.)



PATLITE Europe GmbH



PATLITE (SINGAPORE)




PATLITE (CHINA)



PATLITE KOREA



Patlite Japan Representative Office in Taiwan





# “New Frontiers in Safety, Security and Comfort” is PATLITE’s mission.

PATLITE offers state-of-the-art equipment for process and industrial automation for over 60 years. Our Innovative and robust design, backed by a powerful commitment and years of knowledge, has made PATLITE the world’s best known manufacturer of the visual and audible signaling products. We are also dedicated to the development of explosive and harsh-environment products to demonstrate our strong commitment to serving the industry with unique and innovative solutions.

In order to identify the diversified needs of our customers, and respond quickly and satisfactorily to those needs, we have implemented the POP (Point of Production) System together with a lean-manufacturing cell-based assembly system (combination, single, and flexible assembly). These new systems allow us to handle any order rapidly from single items to customized item orders.

We’ve also reduced development time and production cost by having our own in-house machinery to produce, design and manufacture metal moldings and plastic materials with the use of injection machinery.

From designing to production, from raw material to the finished product, we also manage our quality control throughout the entire process. This is how we maintain our world class quality reputation in the visual, audible signaling and networking information products.

## ■ From designing to production, quality control is managed throughout the process



● Design with 3-D CAD    ● Manufacturing of metal molding parts    ● Electrical discharge machine



● Machining Center    ● Injection molding machines

## ■ Wide-range of Innovative and World-class Quality Products



## ■ World-wide Sales, Marketing and After-sales Support Network



## ■ How Explosion Occurs

An explosion can only occur if there is a combination of the following three factors.

- Source of ignition
- Oxygen
- Combustible substances


Combustible substances can exist in the form of gases, vapor, mist or dust. If one component is missing, no explosion will take place.

## ■ How to minimize an explosion

The following are protective measures to minimize the risk of an explosion.

- Limit concentration to a safe level
- Avoid combustible substances
- Increase ventilation
- Prevent the ignition
- Restrict an explosive effects to a negligible level

### Prerequisites for an explosion

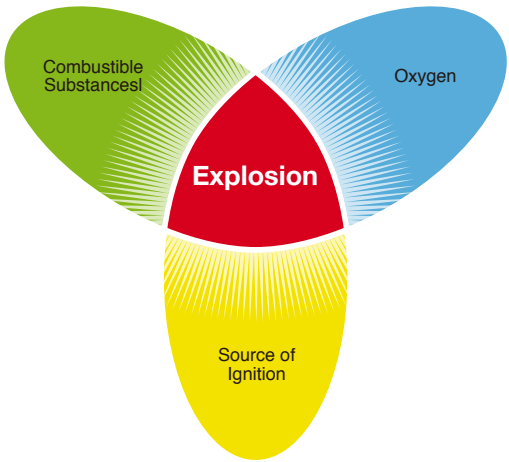

## ■ An explosive environment is categorized in three segments, Zone 0, Zone 1 and Zone 2, depending on the hazardous level of gases and vapors

### Zone 0

An area where an explosive atmosphere consisting of a mixture of air containing flammable substances in the form of gas, liquid, or vapor is continuously present or frequently present or longer period of time.

### Zone 1

An area where an explosive atmosphere consisting of a mixture of air containing flammable substances in the form of gas, liquid, or vapor can occasionally occur during normal operating conditions.

### Zone 2

An area where an explosive atmosphere consisting of a mixture of air containing flammable substances in the form of gas, liquid, or vapor is not likely to occur under normal conditions. However, if it occurs, it will only be for short periods of time.



■ Various Applications for Explosion-Safe and Harsh Environments


	Branch	Explosion Hazard
	Power Generation Companies	<ul style="list-style-type: none"><li>● Lump Coal Dust</li></ul>
	Woodworking Industry	<ul style="list-style-type: none"><li>● Saw Dust</li><li>● Fine Wood Chips</li></ul>
	Metal-work Operations	<ul style="list-style-type: none"><li>● Explosive Metal Dust</li><li>● Spark-ignitable Metal Dust</li></ul>
	Food/Beverage Industry	<ul style="list-style-type: none"><li>● Ignitable Grain Dust</li><li>● Explosive Sugar Dust</li></ul>
	Refinery Industry	<ul style="list-style-type: none"><li>● Hydrocarbons close to their flash-points</li><li>● Oil Processing Plants</li></ul>
	Waste Disposal Companies	<ul style="list-style-type: none"><li>● Waste-water Treatment Gases</li></ul>
	Landfills/Civil Engineering	<ul style="list-style-type: none"><li>● Flammable Landfill Gases</li><li>● Uncontrolled Gas Emissions</li><li>● Flammable Gas from poor ventilation sources</li></ul>
	Pharmaceutical Industry	<ul style="list-style-type: none"><li>● Alcohol Solvents</li><li>● Materials explosive when mixed</li></ul>
	Gas Suppliers	<ul style="list-style-type: none"><li>● Natural Gas Leakage</li><li>● Natural Gas Emissions</li></ul>
	Paint-spraying Operations	<ul style="list-style-type: none"><li>● Overspray in Spray-paint Bays</li><li>● Solvent Vapor Emissions</li></ul>
	Recycling Operations	<ul style="list-style-type: none"><li>● Unemptied flammable gas/liquid containers</li><li>● Biodegradable Material Emitting Explosive Gases</li></ul>
	Chemical Industry	<ul style="list-style-type: none"><li>● Flammable Gases</li><li>● Flammable Liquids</li><li>● Flammable Solids</li></ul>
	Agriculture	<ul style="list-style-type: none"><li>● Bio-gas Production Plants</li><li>● Bio-gas Located on Farms</li></ul>

■ Classification of Hazardous Areas

■ Gases/Vapors

The tank is filled with flammable liquid. The inside of the tank is defined as zone 0, because the explosive gas/oxygen mixture is continuously present. Vapor may escape on occasion through the vent on the top of the tank, therefore the area around the vent is categorized as Zone 1.

The vapor may also run down the outside of the tank, developing another explosive environment, so the area around the tank is categorized as Zone 2.

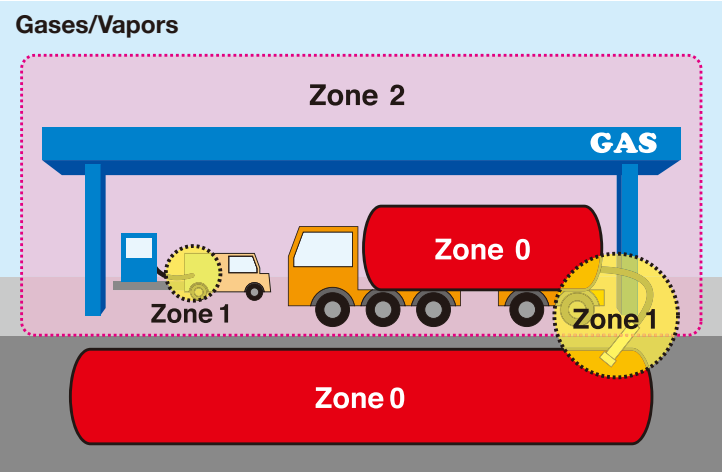


		Constant Exposure	Occasional Exposure	Rare and Temporary
ATEX	EN60079-10	Zone 0	Zone 1	Zone 2
IEC	IEC60079-10	Zone 0	Zone 1	Zone 2
US	NEC505	Zone 0 (Class I)	Zone 1 (Class I)	Zone 2 (Class I)
	NEC500	Division 1 (Class I)		Division 2 (Class I)

■ Dust

At a mill with a feed hopper and filter: A product, which causes dust particles mixed with sufficient air to cause an inflammable mixture, is loaded into a hopper. Inside the feed hopper and filter, it is categorized as Zone 20. While the product is being loaded, the mixture of dust and air

causes a potentially explosive compound in the area where the product is loaded into the hopper, so the area outside the hopper is categorized as Zone 21. Around the hopper where a potential inflammable atmosphere exists temporarily is categorized as Zone 22.

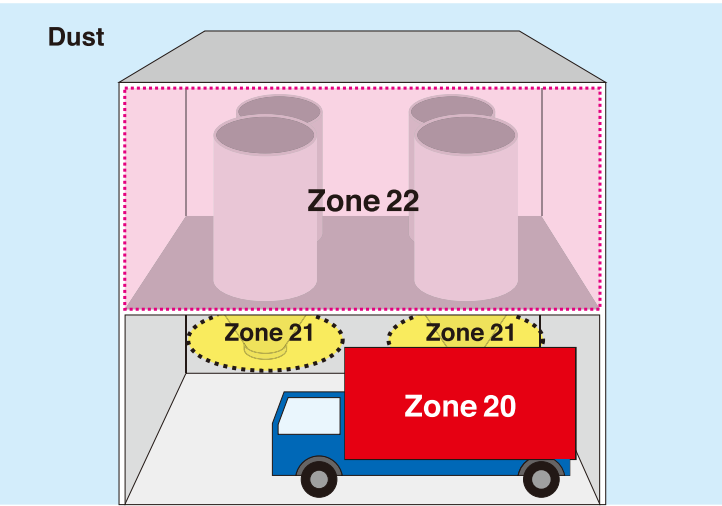

		Constant Exposure	Occasional Exposure	Rare and Temporary
ATEX	EN61241-10	Zone 20	Zone 21	Zone 22
IEC	IEC61241-10	Zone 20	Zone 21	Zone 22
US	NEC505	—	—	—
	NEC500	Division 1 (Class II)		Division 2 (Class II)




## ■ Relationship of IEC, CENELEC, NEC 505 and NEC 500

IEC: International Electrotechnical Commission

CENELEC: European Committee for Electrotechnical Standardization


NEC: National Electrical Code

IEC/CENELEC	Zone 0	Zone 1	Zone 2			
USA:NEC 505	Zone 0	Zone 1	Zone 2			
USA:NEC 500	Division 1		Division 2			
	Explosive Material	Class	Group	Explosive Material	Class	Group
	Gas, Vapor or Liquid	I	A, B, C, D	Gas, Vapor or Liquid	I	A, B, C, D
	Dust	II	E, F, G	Dust	II	E, F, G
	Fibers	III	———	Fibers	III	———

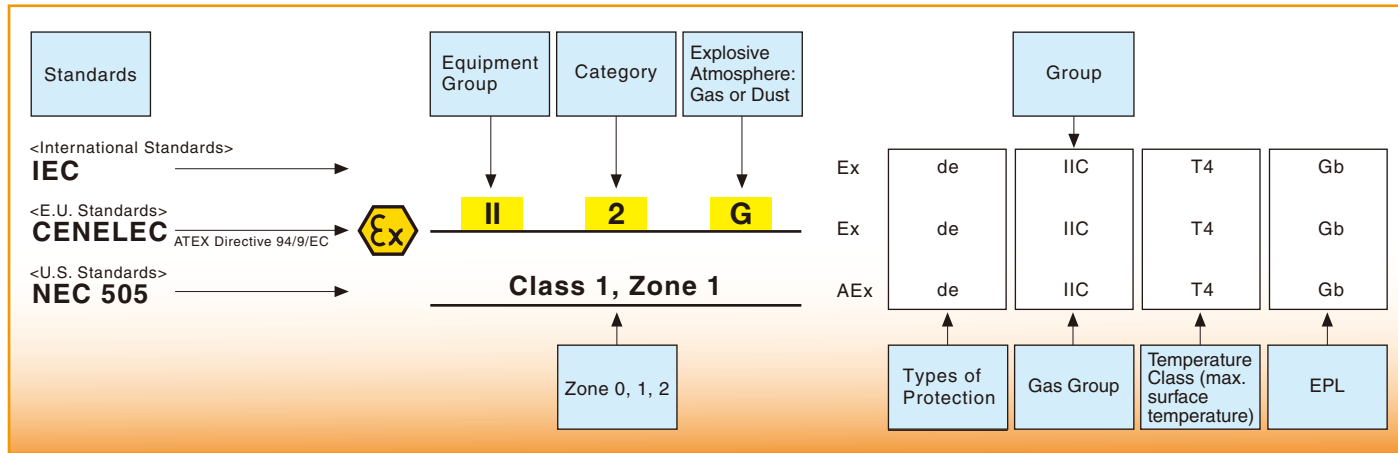


\*EPL:Equipment Protection Level

■ IP Protection Rate: Index of Ingress Protection

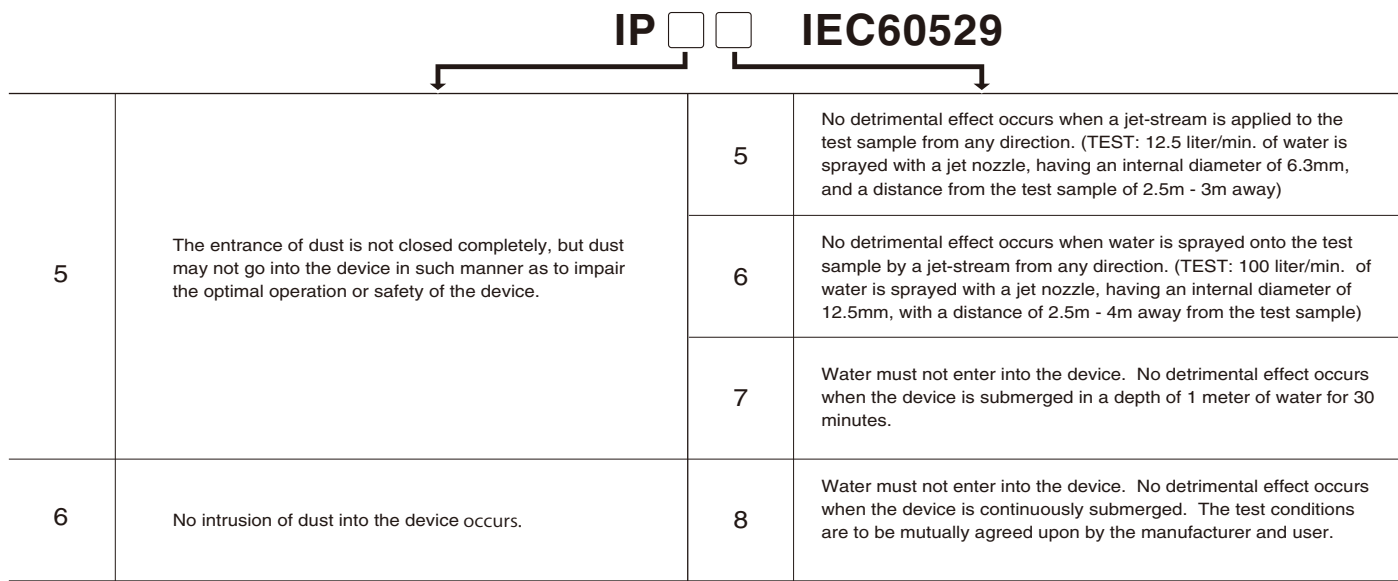

# IP69K

P69K is the German DIN 40050 PART9 standard. It is defined as a protection regulation for high temperature and high-pressurized water. Water is heated up to 80 °C and sprayed at a water pressure in the range from 80 to 100 bars at 14 to 16 liters per minute at the test object. The test object is at a distance of 100 to 150 mm from the nozzle and sprayed in all directions at 0, 30, 60, and 90 degrees, then sprayed at a horizontal angle while it is being rotated, all done for a period of 30 seconds without being affected by water penetration.

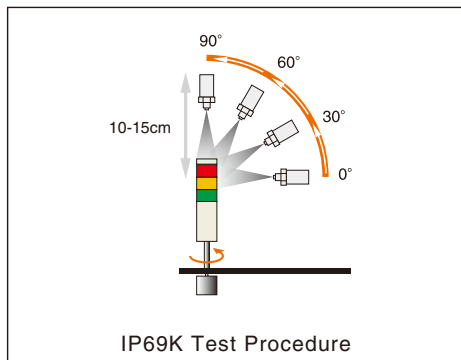

## Types of Protection

According to EN Standard Series EN 60079, explosion protected electrical equipment can have various types of protection according to its construction.

The table below for Gas and Dust shows an overview of the standardized protections and describes its basic principal, as well as its practical applications.

Select the suitable PATLITE explosion-safe and intrinsically-safe products according to the specific application and type of protection.

## Gas

Type of Protection	Marking	Diagram	Definition	Applications	PATLITE Model
General requirements EN 60079-0 IEC 60079-0					
Flameproof Enclosure "d" EN 60079-1 IEC 60079-1	Ex d		Parts which can cause ignition while in a potentially explosive environment are encased in an enclosure which can withstand the pressure to contain it when the explosive mixture ignites inside so it is not transmitted into the environment.	Switch Gear, Control Gear, Display Units, Control Systems, Motors, Transformers, Heating Equipment, Light Fittings	EDLM Series EDWM Series
Increased Safety "e" EN 60079-7 IEC 60079-7	Ex e		Preventative safety precautions are applied to prevent the possibility of excessive temperatures, the occurrence of sparks or electrical arcing within the equipment enclosure or on exposed parts of the equipment that would not be a hazard in conditions where ignition sources are not present.	Terminal Boxes, Connection Boxes, Control Boxes (for installing Ex-components with different types of protection) Squirrel-cage Motors, Light Fittings	
Intrinsic Safety "i" EN 60079-11 IEC 60079-11	Ex ia Ex ib Ex ic		Equipment used in a potentially explosive environment contains intrinsically safe electrical components only. The electric circuit is intrinsically safe when no sparks or internal heat produced under normal operating conditions and specific fault conditions is not capable of causing ignition in a given explosive atmosphere.	Measurement and Control Technology, Communication Technology, Sensors, Actuators. ia = use in Zone 0, 1, 2 ib = use in Zone 1, 2 [Ex ib] = associated equipment - installation in safe areas	
Oil Immersion "o" EN 60079-6 IEC 60079-6	Ex o		Electrical equipment or parts are immersed in a protective fluid (such as oil), to prevent the ignition of a potentially explosive atmosphere which may be located over or outside the equipment.	Transformers, Starting Resistors	
Pressurized Enclosure "p" EN 60079-2 IEC 60079-2	Ex p		Inside the enclosure, a positive internal pressure in relation to the surrounding atmosphere is maintained with the supply of a constant flow of protective gas (when necessary) to dilute any combustible mixtures.	Switch Gear, Control Cabinets, Analyzers, Large Motors. px = use in Zone 1, 2 py = use in Zone 1, 2 pz = use in Zone 2	
Powder Filling "q" EN 60079-5 IEC 60079-5	Ex q		The casing of the electrical equipment is packed with fine granular material to make it impossible for any electric arc created inside the casing under certain operating conditions to ignite the potentially explosive environment outside the casing. Ignition cannot be the result from flames or the raised temperature on the surface of the casing.	Sensors, Display Units, Electronic Ballasts, Transmitters	
Encapsulation "m" EN 60079-18 IEC 60079-18	Ex m		Parts which can cause ignition in a potentially explosive environment by sparking or heating are enclosed in a compound to contain and isolate it from the ignition of an explosive environment.	Switch Gear with small breaking capacities, Control and Signalling Units, Display Units, Sensors. ma = use in Zone 0, 1, 2 mb = use in Zone 1, 2	
Type of Protection "n" EN 60079-15 IEC 60079-15	Ex nA Ex nR Ex nL		Electrical equipment cannot cause the ignition of a potentially explosive atmosphere (defined under abnormal operating conditions and during normal operation).	All Electrical Equipment for Zone 2 nA = non-sparking equipment nC = sparking equipment in which contacts are conveniently protected nL = energy-limited equipment nR = restricted breathing	AR-070 Series AR-078 Series LKEH-FV-EX Series LKEH-FE-EX Series EWH-24E-J-EX CLN-24-CD-PT-EX CLK-EX Series CLA-EX Series

## Dust

Type of Protection	Marking	Diagram	Definition	Applications	PATLITE Model
General requirements EN-IEC 60079-0 IEC 60079-0					
Protection by Enclosures "t" EN-IEC 60079-31 IEC 60079-31	Ex t		Dust is incapable of ingressing the enclosure at all or the quantity is at a safe degree, which allows the ignitable equipment to be mounted inside. The surface temperature of the enclosure will not cause ignition to the surrounding explosive atmosphere.	Switch Gear, Control Gear, Connections, Terminal Boxes, Motors, Light Fittings. td A21 = According to Method A for Zone 21 td B21 = According to Method B for Zone 21	EDLM Series EDWM Series AR-070 Series AR-078 Series LKEH-FV-EX Series LKEH-FE-EX Series EWH-24E-J-EX CLN-24-CD-PT-EX CLK-EX Series CLA-EX Series
Pressurized Enclosure "pD" EN-IEC 61241-4 IEC 61241-4	Ex pD		Inside the enclosure, a positive internal pressure in relation to the surrounding atmosphere is maintained with the supply of a constant flow of protective gas (when necessary) to dilute any combustible mixtures.	Pumps	
Intrinsically Safe "i" EN-IEC 60079-11 IEC 60079-11	Ex ia Ex ib Ex ic		Equipment used in a potentially explosive environment contains intrinsically safe electrical components only. The electric circuit is intrinsically safe when no sparks or internal heat produced under normal operating conditions and specific fault conditions is not capable of causing ignition in a given explosive atmosphere.	Measurement and Control Technology, Communication Technology, Sensors, Actuators. iaD = use in Zone 20, 21, 22 ibD = use in Zone 21, 22 [Ex ibD] = Associated Electrical Equipment - Installation in Safe Areas	
Encapsulation "m" EN-IEC 60079-18 IEC 60079-18	Ex ma Ex mb		Parts which can cause ignition in a potentially explosive environment by sparking or heating are enclosed in a compound to contain and isolate it from the ignition of a layer of dust or cloud.	Small capacity Switch Gear, Controlling and Signalling Units, Display Units, Sensors. maD = use in Zone 20, 21, 22 mbD = use in Zone 21, 22	

Maintenance Free LED Signal Lights

The EDLM and EDWM series LED signal lights are visual warning and status indicating lights for use in hazardous locations that require compliance with the ATEX Directive 94/9/EC (CENELEC standard) or NEC Article 505 certification.

The EDLM and EDWM series offer wide range of voltages and versatile mounting options to meet various applications. The following chart explains the comparison between the ATEX Directive 94/9/EC (CENELEC standard) and NEC Article 505 certification. To find the most suitable models, refer to page 9 and 10.

Protection Method (ATEX/IEC)





**Flame-proof Enclosure Type "d"**  
In flame-proof enclosures, an explosion is contained.



**Protection Type "t"**  
Dust-protected and flame-proof enclosure.



Standard Markings

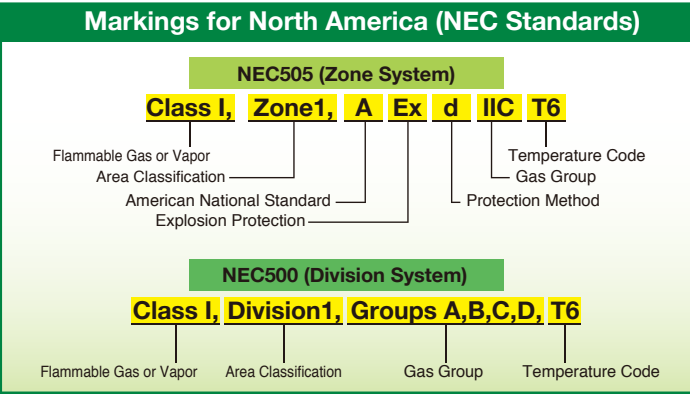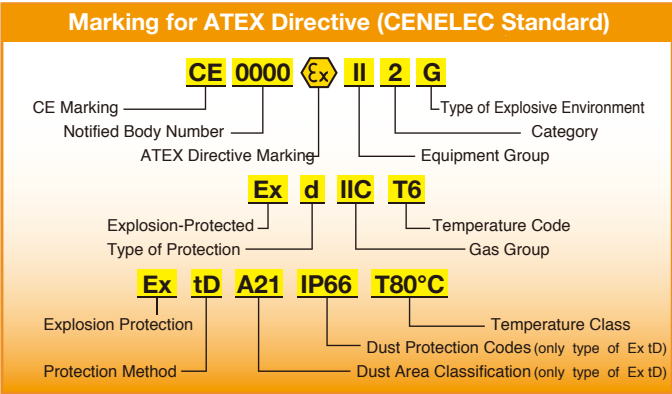

Explosion-safe Protection

	Europe (ATEX Directive / (CENELEC) International (IEC)				North America Class I			
Protection Method	Protection Code	Zone	CENELEC ATEX	IEC IECEX	Protection	Zone	US	NEC500 Division
Flameproof	Ex d	1, 2	EN60079-1	IEC60079-1	AEx d	1, 2	ANSI/ISA 60079-1	1, 2
Increased Safety	Ex e	1, 2	EN60079-7	IEC60079-7	AEx e	1, 2	ANSI/ISA 60079-7	—
Intrinsic Safety (2 faults)	Ex ia	0, 1, 2	EN60079-11	IEC60079-11	AEx ia	0, 1, 2	ANSI/ISA 60079-11	1, 2
Intrinsic Safety (1 fault)	Ex ib	1, 2	EN60079-11	IEC60079-11	AEx ib	1, 2	ANSI/ISA 60079-11	—
Purged/Pressurized	Ex p	1, 2	EN60079-2	IEC60079-2	AEx p	1, 2	ANSI/ISA 60079-2	1, 2
Encapsulation	Ex m	1, 2	EN60079-18	IEC60079-18	AEx e	1, 2	ANSI/ISA 60079-18	—
Non-incendiaries	—	—	—	—	—	—	—	2
Type-n	Ex n	2	EN60079-15	IEC60079-15	AEx n	2	ANSI/ISA 60079-15	—

Zone Classification

	CENELEC IEC	NEC505	Hazardous Area Classification
Gases	Zone 0	Class I Zone 0	An area where the mixture of explosive gas is continuously present or present for long periods.
	Zone 1	Class I Zone 1	An area where the mixture of explosive gas can be present during normal operation.
	Zone 2	Class I Zone 2	An area where the mixture of explosive gas is not normally present, but if it occurs, it will only be for brief periods of time.
Vapors	Zone 20	—	An area where the mixture of incendiary dust is continuously present or present for long periods.
	Zone 21	—	An area where the mixture of incendiary dust can be present during normal operation.
	Zone 22	—	An area where the mixture of incendiary dust is not normally present, but if it occurs, it will only be for brief periods of time.

ATEX Directive (CENELEC)

Equipment Group	Category- Protection Level	Explosive Environment	Flammable Substances	Hazardous Areas
I -mines	M1- Very High Level	Constant Exposure	Methane	—
	M2- High Level	Ocassional Exposure	Coal Dust	—
II -other areas	1- Very High Level	Constant Exposure	Gases	Zone 0 (Gases) Zone 20 (Dust)
	2- High Level	Ocassional Exposure	Vapors	Zone 1 (Gases) Zone 21 (Dust)
	3- Normal Level	Rare and Temporary	Mists	Zone 2 (Gases) Zone 22 (Dust)

ATEX/IEC Classification for Gases & Temperature Coding

	T1 (450°C)	T2 (300°C)	T3 (200°C)	T4 (135°C)	T5 (100°C)	T6 (85°C)
I	Methane	—	—	—	—	—
IIA	Acetone Ethane Propane	Ethyl Alcohol Cyclohexane n-butane	Gasoline Aircraft fuel Diesel fuel	Acetaldehyde	—	—
IIB	Lighting gas Acrylonitrile	Ethylene Ethylene oxide	Ethylene Glycol Hydrogen sulphide	Ethyl-ether	—	—
IIC	Hydrogen	Acetylene	—	—	—	Carbon bisulfide

Visual/Audible Signaling Products & LED Work Lights

A wide range of visual and audible signaling products, as well as super bright LED light bars, designed for use in hazardous locations that require the ATEX Directive 94/9/EC (CENELEC


Standard). These unique and innovative models meet the criteria for Zone 2 (gas) and Zone 22 (dust) atmospheres.



LED Signal Towers				Hazardous Area	
Model Selection	Page	CENELEC Standard	Explosion Safety	Gas	Dust
AR-070 Series	11	EN 60079-0, EN 60079-15, EN 60079-31	CE  II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T85°C Dc IP65	Zone2	Zone22
AR-078 Series	12	EN 60079-0, EN 60079-15, EN 60079-31	CE  II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T85°C Dc IP65	Zone2	Zone22
MP3 Field Programmable Annunciator integrated with LED tower				Hazardous Area	
Model Selection	Page	CENELEC Standard	Explosion Safety	Gas	Dust
LKEH-FV-EX Series	13	EN 60079-0, EN 60079-15, EN 60079-31	CE  II 3GD Ex nA IIC T4 Gc, Ex tc IIIB T85°C Dc IP54	Zone2	Zone22
LKEH-FE-EX Series	13	EN 60079-0, EN 60079-15, EN 60079-31	CE  II 3GD Ex nA IIC T4 Gc, Ex tc IIIB T85°C Dc IP54	Zone2	Zone22
Voice Annunciator, Melodies & Chimes Horns				Hazardous Area	
Model Selection	Page	CENELEC Standard	Explosion Safety	Gas	Dust
EWH-24E-J-EX	15	EN 60079-0, EN 60079-15, EN 60079-31	CE  II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T85°C Dc IP65	Zone2	Zone22
Super Bright LED Work Lights				Hazardous Area	
Model Selection	Page	CENELEC Standard	Explosion Safety	Gas	Dust
CLN-24-CD-PT-EX	15	EN 60079-0, EN 60079-15, EN 60079-31	CE  II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc IP65	Zone2	Zone22
CLK-EX Series	16	EN 60079-0, EN 60079-15, EN 60079-31	CE  II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc IP65	Zone2	Zone22
CLA-EX Series	16	EN 60079-0, EN 60079-15, EN 60079-31	CE  II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc IP65	Zone2	Zone22


\* These products are manufactured by PATLITE, converted and certified to explosion-safe by Artidor, and sold by PATLITE.

Markings

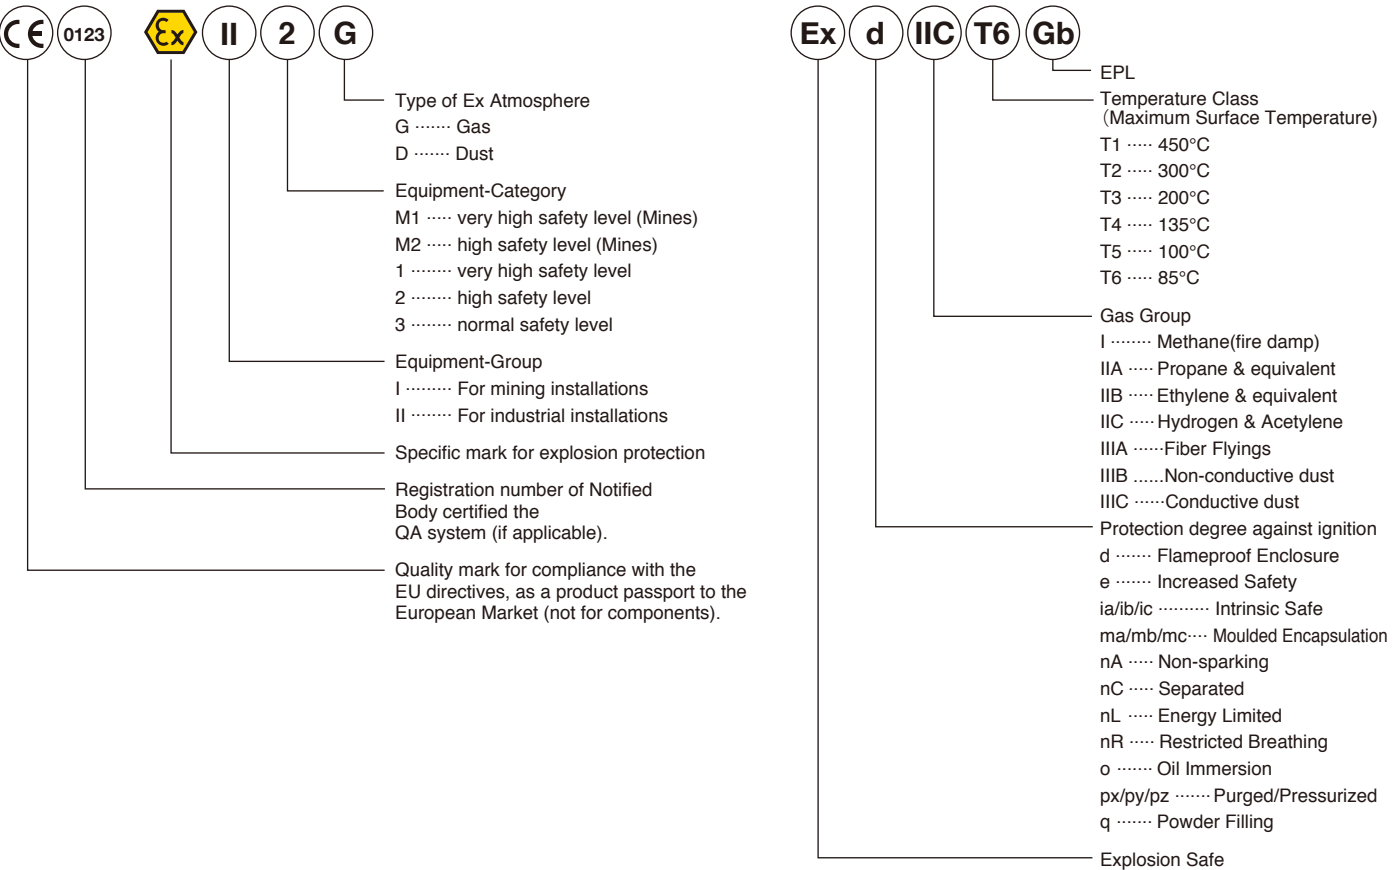





EDLM SERIES & EDWM SERIES EXPLOSION-SAFE




EDLMEDWM




Wall Mount



Horizontal Mount



Vertical Mount



### Descriptions

The EDLM (3 tiered LED) and EDWM (5 tiered LED) models are innovative LED maintenance-free Explosion-safe Signal Towers. Their robust design, along with pressure and flame-proof housing is ideal for use in potentially flammable and hazardous explosive environments, such as chemical, petrochemical, combustible dust, mineral/natural gas production; as well as for the food and beverage industries.

### Features

- Housing: Aluminum alloy
- Glass: Borosilicate glass
- Terminals: Easy wire connection to the Signal Tower by opening the bottom
- Mounting: Upright, Wall Mount, Vertical-mount, and Horizontal Mount
- LED color: Different color configurations are possible to custom-design
- Voltage: 24VAC/DC, 120VAC, 230VAC, 90-250VAC are available.
- Wire core size: 0.5mm<sup>2</sup>~0.8mm<sup>2</sup>, AWG20~AWG18

EDLM & EDWM are convered by the specifications shown in the shaded areas below

Common Standards for Europe •The ATEX directive is a CENELEC standard.

Classification	Standard	PATLITE Models	Constant Exposure	Occasional Exposure	Rare and Temporary
ATEX, IEC/EU Directive 94/9/EC	IEC 60079-10 EN 60079-10	EDLM, EDWM	Zone 0	Zone 1	Zone 2

Common Standards for the USA •NEC is a National Electrical Code standard for North America.

Classification	Standard	PATLITE Models	Constant Exposure	Occasional Exposure	Rare and Temporary
NEC Article 505	ANSI/NFPA 71	EDLM, EDWM	Zone 0	Zone 1	Zone 2
NEC Article 500	ANSI/NFPA 70	—	Division 1		Division 2


CENELEC (ATEX Directive)

Model	EDLM-302FE	EDLM-312FE	EDLM-323FE	EDWM-502FE	EDWM-5M2FE
Voltage Rating	AC/DC 24V	AC 120V	AC 230V	AC/DC 24V	AC 90~250V
Signal line Current (Per LED Module)	Red/Amber: 52.5mA Green: 20.0mA			Red: 22.6mA, Amber: 26.6mA, Green: 17.5mA Blue/White: 38.9mA	
Explosion Protection Ratings	Ⓔ II2G Ex d IIC T6 (Zone1,2) Ⓔ II2D Ex tD A21 IP66 T80°C (Zone21,22)				
OperatingTemperature	-20°C~+50°C (No ice)				
Operating Humidity	45%~85%RH (Keep from dew condensation)				
Ambient Pressure	80~110kpa				
Lighting Pattern	Flashing (60±12 flashes per minute) / Continuous Light				
Protection Rating	IP66				
Vibration Resistance	9.8m/s <sup>2</sup>				
Mounting	Outdoor & Indoor Upright			Outdoor & Indoor	Upright & Sideways
Luminosity	Red: 350mcd, Amber: 580mcd Green: 1300mcd			Red/Green/White: 1000mcd Amber: 700mcd, Blue: 300mcd	
Mass (Main Body)	4.3kg			4.7kg	
Material	Upper & Lower Case : Aluminum Alloy (Housing Finish: Melamine-baked Finish) Glass Case : Borosilicate Glass Fitting Bracket : Stainless Steel (SUS 316) Cable Gland : Brass				

NEC Article 505


Model	EDLM-302FA	EDLM-312FA	EDLM-323FA	EDWM-502FA	EDWM-5M2FA
Voltage Rating	AC/DC 24V	AC 120V	AC 230V	AC/DC 24V	AC 90~250V
Signal line Current (Per LED Module)	Red/Amber: 52.5mA Green: 20.0mA			Red: 22.6mA, Amber: 26.6mA, Green: 17.5mA Blue/White: 38.9mA	
Explosion Protection Ratings	Class I , Zone 1 AEx d IIC T6				
OperatingTemperature	-25°C~+50°C (No ice)				
Operating Humidity	45%~85%RH (Keep from dew or condensation)				
Ambient Pressure	80~110kpa				
Lighting Pattern	Flashing (60±12 flashes per minute) / Continuous Lighting				
Protection Rating	IP66				
Vibration Resistance	9.8m/s <sup>2</sup>				
Mounting	Outdoor & Indoor Upright			Outdoor & Indoor Upright & Sideways	
Luminosity	Red: 350mcd, Amber: 580mcd Green: 1300mcd			Red/Green/White: 1000mcd Amber: 700mcd, Blue: 300mcd	
Mass (Main Body)	4.3kg			4.7kg	
Material	Upper & Lower case : Aluminum Alloy (Housing Finish: Melamine-baked Finish) Glass case : Borosilicate Glass Fitting Bracket : Stainless Steel (SUS 316)				

### Dimensions (EDLM, EDWM)

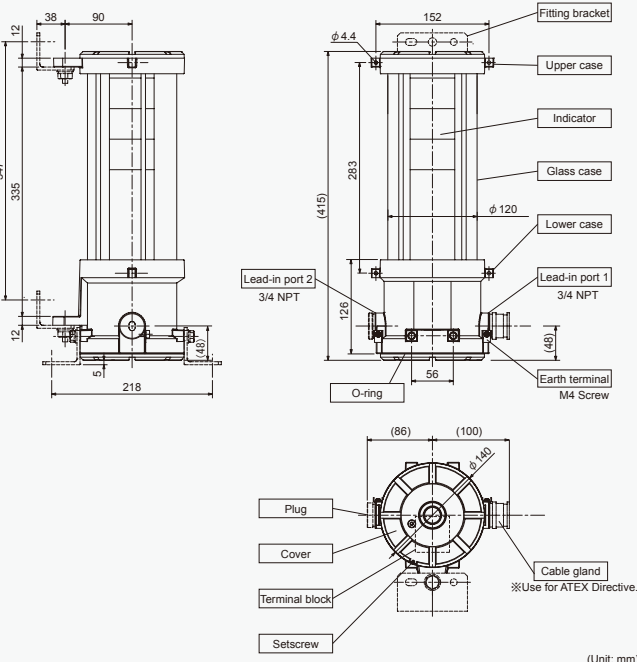


(Unit: mm)

### Installation (Wall-mount)

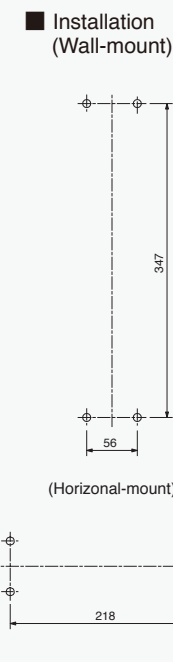


(Horizontal-mount)

### Cable Gland\*



3/4 NPT  
(31)  
(24)  
\*ATEX Model ... Included  
\*NEC Model ..... Not Included


### Flush-mount Bracket



(Unit: mm)


### Wiring Diagram EDLM (3 color LED)

#### EDLM-302FE/ EDLM-302FA

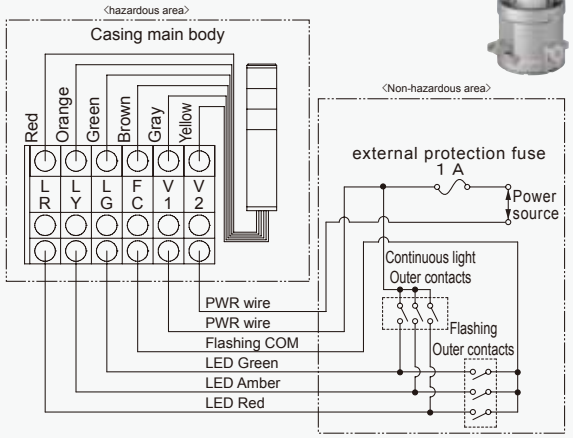

external protection fuse 1 A  
Power source  
Casing main body  
PWR wire  
PWR wire  
Flashing COM  
LED Green  
LED Amber  
LED Red  
Continuous light  
Outer contacts  
Flashing  
Outer contacts

#### EDLM-312FE/ EDLM-312FA EDLM-323FE/ EDLM-323FA

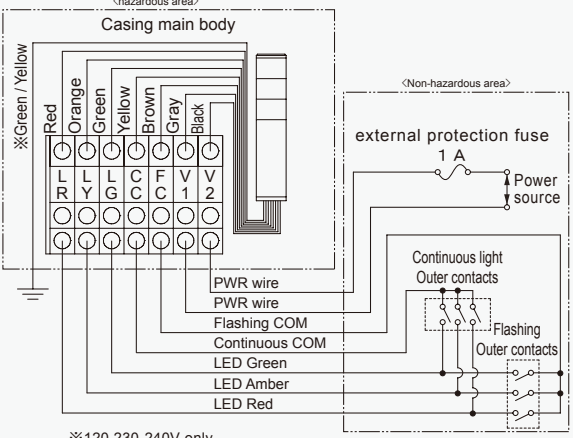


external protection fuse 1 A  
Power source  
Casing main body  
PWR wire  
PWR wire  
Flashing COM  
Continuous COM  
LED Green  
LED Amber  
LED Red  
Continuous light  
Outer contacts  
Flashing  
Outer contacts

※120,230-240V only  
<external protection fuse> All model : 250V 1A


### Wiring Diagram EDWM (5 color LED)

#### EDWM-502FE/ EDWM-502FA

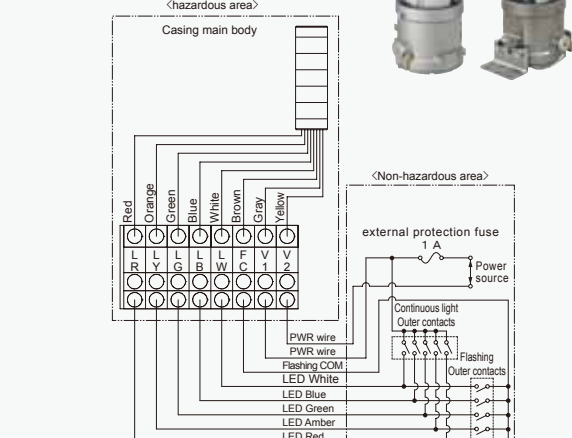

external protection fuse 1 A  
Power source  
Casing main body  
PWR wire  
PWR wire  
Flashing COM  
LED White  
LED Blue  
LED Green  
LED Amber  
LED Red  
Continuous light  
Outer contacts  
Flashing  
Outer contacts

#### EDWM-5M2FE/ EDWM-5M2FA

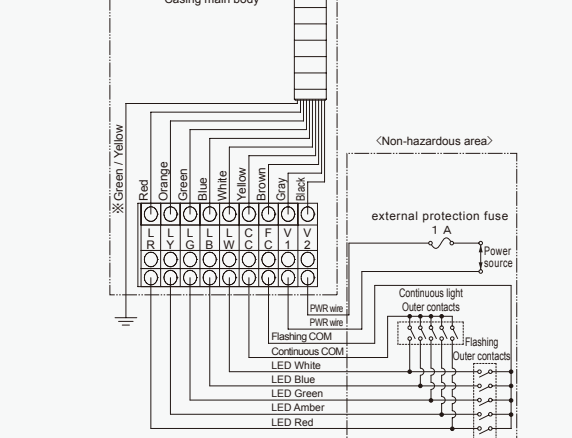

external protection fuse 1 A  
Power source  
Casing main body  
PWR wire  
PWR wire  
Flashing COM  
Continuous COM  
LED White  
LED Blue  
LED Green  
LED Amber  
LED Red  
Continuous light  
Outer contacts  
Flashing  
Outer contacts

<external protection fuse> All model : 250V 1A

AR-070 SERIES EXPLOSION-SAFE

CE II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T85°C Dc IP65 94/9/EX(ATEX)CENELEC:EN 60079-0, EN 60079-15, EN 60079-31

Explosion-safe Signal Light Ø40mm

Description


Explosion-safe Signal Light featuring an LED light that is versatile and energy-efficient. The vertical and horizontal cut lenses in combination with a double-reflection system enhances the LED light diffusion to create a unique, full and brilliant light. The lenses and main body are made of strong synthetic materials with characteristics to withstand harsh environments. The Signal Light can be ordered in any combination from 1 to 5 LED units with any color combination. In addition to its "continuous lighting" condition, the Signal Light can also be ordered with flashing / non-flashing functions, as well as with two super-loud alarm sounds with an 85dB (at 1m) output.

Features

- Explosion-safe for gas and dust
- Suitable for Zone 2 and Zone 22
- CE compliance in accordance to ATEX
- Full and brilliant lumination
- LED double reflection lighting system
- Different lens colors available
- 1 to 5 stack are available
- 1/2" NPT adapter for pole mount is available as an option
- Available with "flashing/non flashing" and two audible buzzer alarm sounds
- Ingress protection of IP65
- Wall mount or direct mount




Dimensions

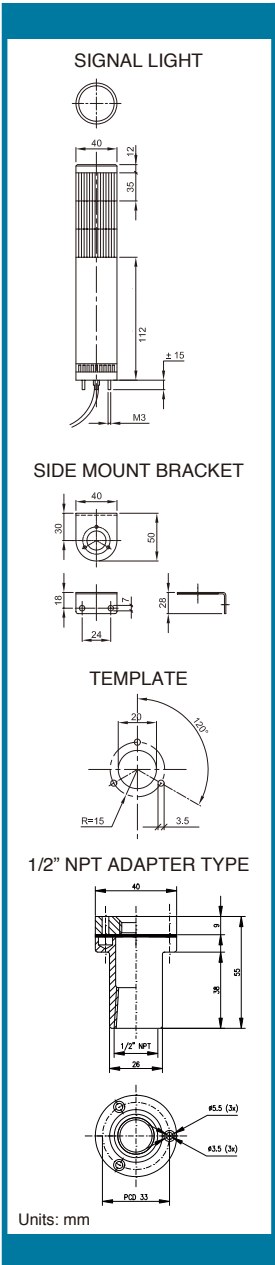

Specifications

Explosion-safety:	CE II 3 GD; Ex nA IIC T4 Gc: Ex tc IIIC T85 °C Dc IP65
CE conformities:	EN 60079-0, EN 60079-15, EN 60079-31
Certification:	EC-Declaration of conformity
Ambient Temperature:	-30 °C to +60 °C
Ingress Protection:	IP65 to EN 60529
Material:	ABS towerbody
Lighting Source:	Multiple LEDs with double reflection system
Acoustical Source:	Buzzer 85 dB (1m) with two different tones
Rated Voltage:	24V AC/DC
Assembly position:	As desired
Activation Time:	100%
Module Colors Available:	Red, Amber, Green, Blue, Clear/white
Cable:	Factory sealed cable, Ø 8 mm, length 3 meter

CURRENT RATINGS			
LED		BUZZER	
Signal	Line Current	Signal	Line Current
Red, Amber	Green, Blue, Clear	Inrush	Current
approx. 30 mA	approx. 25 mA	approx. 40 mA	approx. 250 mA

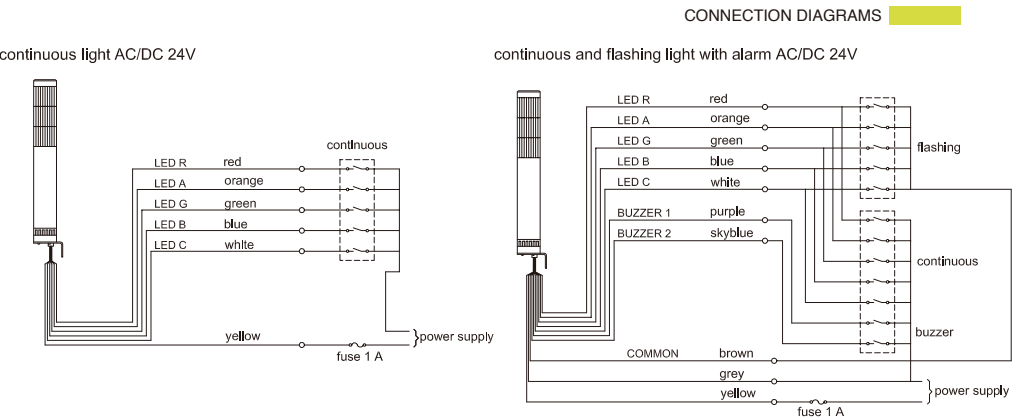

EXPLOSION-SAFE SIGNAL LIGHT								
How to order	Code	Voltage	Code	No. of Stacks	Code	Bracket	Colors*	Code
Continuous lighting (only)	1	24V AC/DC	1	1-5	1	□:L Type N:NPT Type	Red	R
					2		Amber	Y
					3		Green	G
Continuous/Flashing lighting and two Audible alarms	2				4		Blue	B
					5		Clear/White	C

Model Code AR-070- 0 1 / - RYGB C \*Colors are arranged from top to bottom  
※ 90~250V AC Version is available by special order.

AR-078 SERIES EXPLOSION-SAFE

CE II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T85°C Dc IP65 94/9/EX(ATEX)CENELEC:EN 60079-0, EN 60079-15, EN 60079-31

Explosion-safe Signal Light Ø60mm

Description


Explosion-safe Signal Light featuring an LED light that is versatile and energy-efficient. The vertical and horizontal cut lenses in combination with a double-reflection system enhances the LED light diffusion to create a unique, full and brilliant light. The lenses and main body are made of strong synthetic materials with characteristics to withstand harsh environments. The Signal Light can be ordered in any combination from 1 to 5 LED units with any color combination. In addition to its "continuous lighting" condition, the Signal Light can also be ordered with flashing / non-flashing functions, as well as with two super-loud alarm sounds with an 90dB (at 1m) output.

Features

- Explosion-safe for gas and dust
- Suitable for Zone 2 and Zone 22
- CE compliance in accordance to ATEX
- Full and brilliant lumination
- LED double reflection lighting system
- Different lens colors available
- 1 to 5 stack are available
- 3/4" NPT adapter for pole mount is available as an option
- Available with "flashing/non flashing" and two audible buzzer alarm sounds
- Ingress protection of IP65
- Wall mount or direct mount




Dimensions

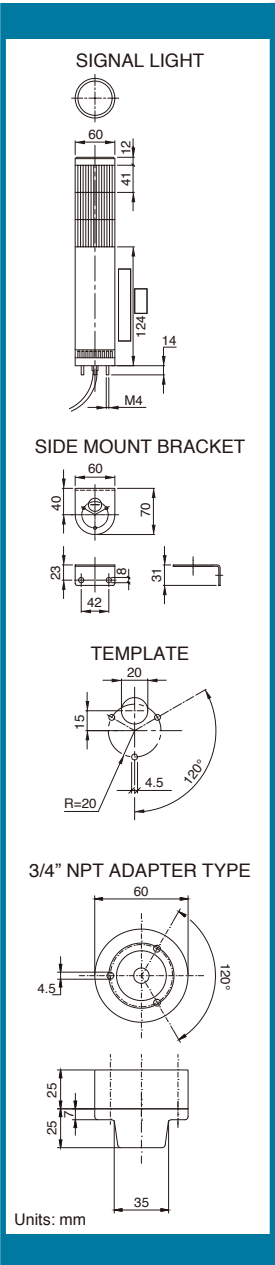

Specifications

Explosion-safety:	CE II 3 GD; Ex nA II T4; Ex tD A22 IP65 T85°C
CE conformities:	EN 60079-0, EN 60079-15, EN 61241-0, EN 61241-1
Certification:	EC-Declaration of conformity
Ambient Temperature:	-30 °C to +60 °C
Ingress Protection:	IP65 to EN 60529
Material:	ABS towerbody, polyester glassfibre reinforced base
Lighting Source:	Multiple LEDs with double reflection system
Acoustical Source:	Buzzer 90 dB (1m) with two different tones
Rated Voltage:	24V AC/DC
Assembly position:	As desired
Activation Time:	100%
Module Colors Available:	Red, Amber, Green, Blue, Clear/white
Cable:	Factory sealed cable, Ø 8 mm, length 3 meter

CURRENT RATINGS			
LED		BUZZER	
Signal	Line Current	Signal	Line Current
Red, Amber	Green, Blue, Clear	Inrush	Current
approx. 30 mA	approx. 25 mA	approx. 40 mA	approx. 250 mA

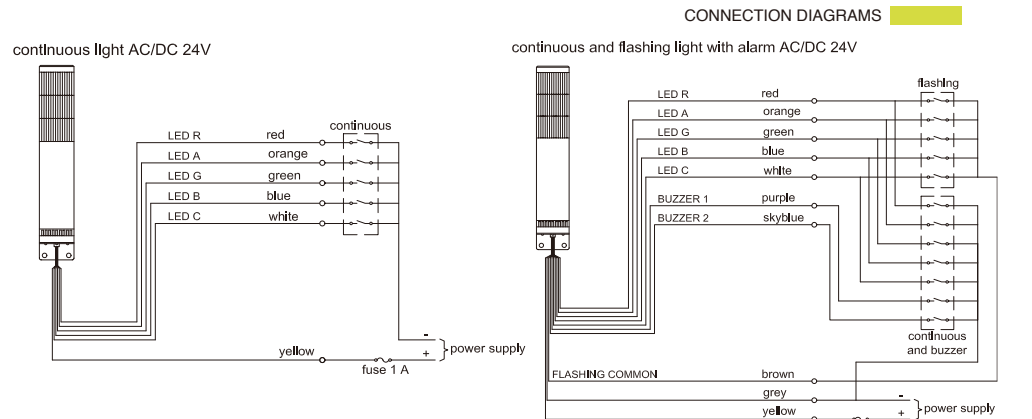

EXPLOSION-SAFE SIGNAL LIGHT								
How to order	Code	Voltage	Code	No. of Stacks	Code	Bracket	Colors*	Code
Continuous lighting (only)	1	24V AC/DC	1	1-5	1	□:L Type N:NPT Type	Red	R
					2		Amber	Y
					3		Green	G
Continuous/Flashing lighting and two Audible alarms	2				4		Blue	B
					5		Clear/White	C

Model Code AR-078- 0 1 / - RYGB C \*Colors are arranged from top to bottom  
※ 220V AC Version is available by special order.

LKEH-FE-EX, LKEH-FV-EX EXPLOSION-SAFE

CE II 3GD Ex nA IIC T4 Gc, Ex tc IIIB T85°C Dc IP54 94/9/EX(ATEX)CENELEC:EN 60079-0, EN 60079-15, EN 60079-31

105dB(A)

MP3 Field Programmable Annunciator, Melody Horn

- Explosion-safe for gas and dust
- Suitable for Zone 2 and Zone 22
- CE compliance in accordance to ATEX
- Super bright LED colors correspond to different voice, sounds, chimes and melodies.
- Voice alert messages of up to 63 seconds (64kbit/s) with 5 channels can be played back.
- 32 combinations of sounds, chimes and melodies are pre-recorded.
- 8 sounds can be played back by a bit input, and 32 sounds by binary input.
- Volume is adjustable from 0 to 105dB at 1 meter.
- Field programmable with MP3 by SD card for the model LKEH-FV-EX.
- Well visible with the super bright 100mm diameter LED from far distance.
- Robust design to withstand against 2G vibration.
- The body is made of Acrylonitrile-Ethylene-Styrene for weather resistant.
- Easy to control by only one common wire for both LED units and audible signals.
- NPN is standard. PNP open collector type is also available on order.



Ultra bright LED

105dB horn

Insert SD card into the slot.

Attention  
Atención  
Aufmerksamkeit

LKEH-FV-EX, LKEH-FE-EX

RoHS

CE

Ex

EWH-24E-J-EX EXPLOSION-SAFE

CE II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T85°C Dc IP65 94/9/EX(ATEX)CENELEC:EN 60079-0, EN 60079-15, EN 60079-31

105dB (at 1m) Melodies & Chimes Horn

- Explosion-safe for gas and dust
- Suitable for Zone 2 and Zone 22
- CE compliance in accordance to ATEX
- 32 combinations of melodies, chimes and sounds are pre-recorded.
- Adjustable audible sound volume up to 105dB at 1 meter
- Indoor Installation: upright, inverted, and sideways.
- Outdoor: upright installation only.
- Provided with the anti-corrosive stainless steel mounting bracket.
- NPN is standard for the EWH type. PNP open collector is available on order.
- IP65




EWH-24E-J-EX

Ex

RoHS

CE

■ Dimensions

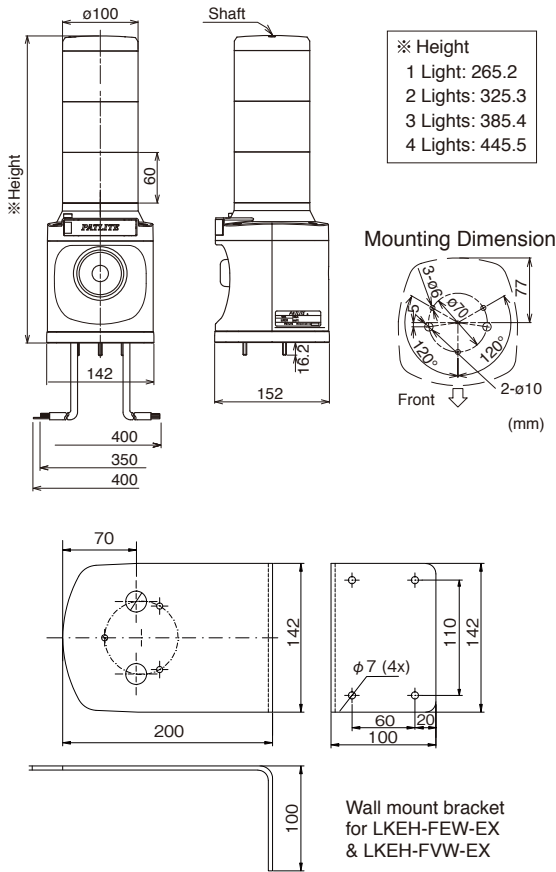

■ Sound Selection Charts


- 32 sounds are pre-recorded in one unit. 4 sound types are available.
- 8 sounds can be played back by a bit input, and 32 sounds by binary input.

Beep	Stutter + Bell	Inverted Revelle	Annie Laurie
Stutter	Synthesized Melody	Galactic Motor	London Bridge
Bell	Chime	Ringing Phone	Mary's Lamb
Yelp	Call Sign	Two Tone	Camptown Races
Rapid Hi Lo	Train Ride	Alarm Clock	Amaryllis
Melody Chime	Galloping Hi Lo	Ringling Hi Lo	Symphony #40
Synthesized Piano	Alien Chatter	Fur Elise	Ave Maria
Synthesized Bell	Falling Crystals	Minuet	Grandfather's Clock

Model	MP3	Power
LKEH-FEF-EX/LKEH-FEW-EX	—	14.2W
LKEH-FVF-EX/LKEH-FVW-EX	Supports	14.2W

• SD card for the model LKEH-FVF-EX and LKEH-FVW-EX sold separately.

■ Model Code

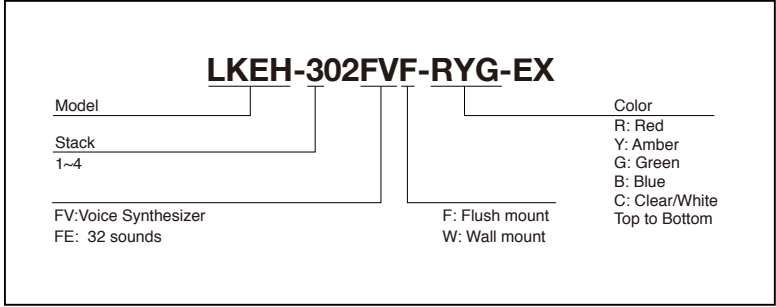


■ Specifications

Model	Rated Voltage	Voltage Range	MP3, Melody	Operating Temperature	Recordable Duration	Sound Pressure (at 1m)	Mounting Brackets	Messages	Mass
LKEH-FEF-EX	24VDC	24VDC +/-10%	Type-E	-10C to +50C, Humidity 85% or less	Prerecorded	105dB	Flush mount	8ch bit input, 32ch binary input	2.8Kg
LKEH-FEW-EX			Type-E		Prerecorded		Wall mount	8ch bit input, 32ch binary input	3.2Kg
LKEH-FVF-EX			MPEG1-Audio layer III, 64kbit/s		63 sec.		Flush mount	5ch bit input, 31ch binary input	2.8Kg
LKEH-FVW-EX			MPEG1-Audio layer III, 64kbit/s		63 sec.		Wall mount	5ch bit input, 31ch binary input	3.2Kg

The mass indicated is based on a 3 tiered LED Model LKEH. The mass will change in conjunction with the number of tiers.


■ Dimensions

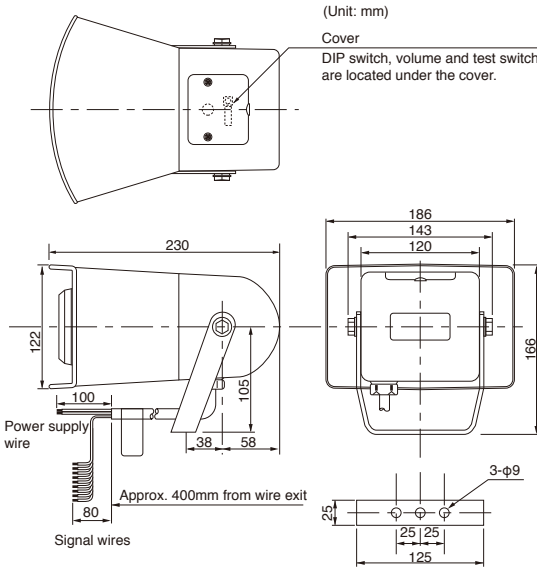

Test Switch

The test switch can be used to check the operation or adjust sound volume (Located under the cover).

■ Wiring Diagram

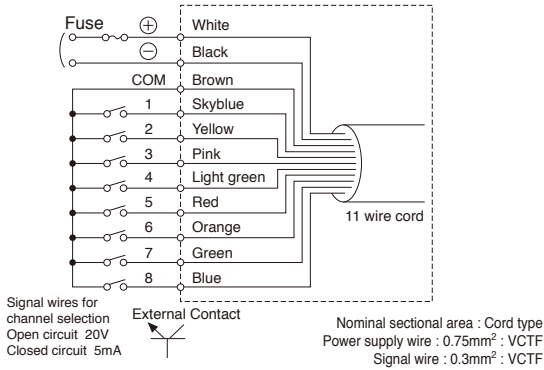

■ Sound Selection Charts

- Pre-recorded on model EWH-24E-J-EX

Beep	Stutter + Bell	Inverted Revelle	Annie Laurie
Stutter	Synthesized Melody	Galactic Motor	London Bridge
Bell	Chime	Ringling Phone	Mary's Lamb
Yelp	Call Sign	Two Tone	Camptown Races
Rapid Hi Lo	Train Ride	Alarm Clock	Amaryllis
Melody Chime	Galloping Hi Lo	Ringling Hi Lo	Symphony #40
Synthesized Piano	Alien Chatter	Fur Elise	Ave Maria
Synthesized Bell	Falling Crystals	Minuet	Grandfather's Clock

■ Specifications

Model	Rated Voltage	Voltage Range	Power Consumption	Volume	Outer Contact Capacity	Operating Temperature Range	Auxiliary Input	Channel	Protection Rating	Mass
EWH-24E-J-EX	12/24V AC/DC	8~28V AC 9~35V DC	8W	Max. 105dB at 1m	No more than 5A	-20°C~+60°C Humidity 85% or less.	EWH: Non-voltage Contact	8ch/1bit or 32ch/binary	IP65	1.2kg



CLN-24-CD-PT-EX EXPLOSION-SAFE

CE ⚡ II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc IP65 94/9/EX(ATEX)CENELEC:EN 60079-0, EN 60079-15, EN 60079-31

Water/Oil Resistant LED Work Light


- 820 lx brightness, equivalent to a 40 watt incandescent bulb
- 60,000 hrs., or about 7 years of long service life (\*1)
- IP66G, IP67G, IP69K protection (\*2)
- 24VDC (Polarized)
- IEC62471 Compliance (Photobiological Safety Standard)
- Daylight Color Temperature (6,500K) suitable for very detailed work
- Comes with a flexible stainless-steel angle bracket for versatile installation (\*3)
- Wide operating ambient temperature range (-40°C to +60°C)
- Low current draw of 174mA
- Very compact, light-weight and durable design
- (Thickness) 22.2mm X (Width) 85mm X (Height) 128mm



CLN-24-CD-PT-EX



Light Distribution Characteristics

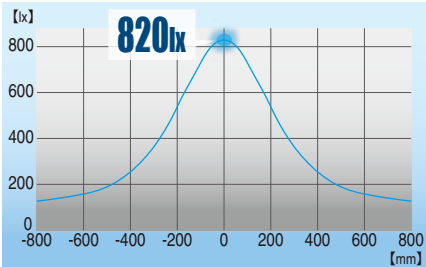

High power LED with 820 lx provides sufficient illumination with only a 174mA current draw.



Stainless steel flexible angle bracket allows a versatile installation, instantly enabling direct illumination to the work area.

Floor Mount



Wall Mount



Ceiling Mount



※ The pan/tilt brackets can also be removed for Rear Attachment applications.

Color temperature of 6,500K is suitable for detailed and fine work, while providing photobiological safety.



Natural light distribution when illuminating a wider work area with an equivalent to a 40W incandescent bulb with 550 lumens.




Specifications

Model	CLN-24-CD-PT-EX
Color Code (Color)	CD (Daylight)
Color Temperature (typ.)	6500K
Illumination (typ.) (Centered at 24VDC) 1m	820 lx
Total Luminous Flux (typ.)	550 lm
Rated Voltage	24VDC (Polarized)
Operating Voltage Range	24V DC ±10%
Rated Consumption Current/Power Dissipation	174mA ±10% / 4.2W
Operating Ambient Temperature	-40°C to +60°C (90% RH, No Condensation)
Main Unit Material	Body: Aluminum Alloy, Lens: Tempered Glass
Protection Rating	IP66G/67G (JIS C 0920)/69K (DIN 40050 part 9) (excluding cable ends)
Mounting Location/Direction	Indoor / Any Direction
Insulation Resistance	DC 500V 5MΩ or more
Withstand Voltage	500VAC for 1 minute (Between terminals and chassis)
Vibration Resistance	30Hz total amplitude 0.3mm <sup>P</sup> Back and forth, up and down, right and left for 2 hours each Total amplitude 0.3mm <sup>P</sup> (10-57Hz), Acceleration 19.6m/s <sup>2</sup>
Mass (Tolerance ±10%)	430g

\*1 : The typical value of LED brightness is 70% of the original specification, but may vary depending on actual applications.  
\*2 : IP66G and IP67G are Japanese Industrial Standards (JIS C0920-2003), and IP69K is the German DIN 40050 PART9 Standard.  
\*3 : CLN-24-CD-PT-EX Work Light can only be installed where risk of mechanical danger is limited to 2 Joules of impact energy

Dimensions

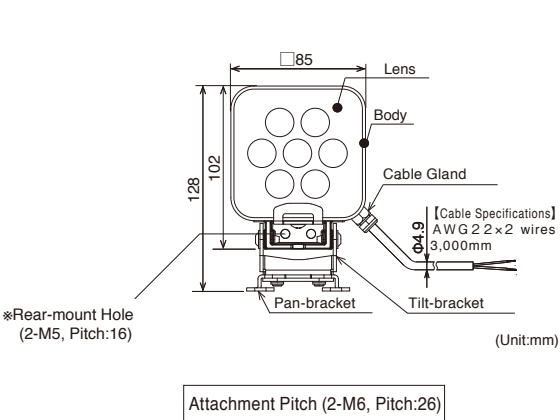

CLK- -24- -EX EXPLOSION-SAFE

CE ⚡ II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc IP65 94/9/EX(ATEX)CENELEC:EN 60079-0, EN 60079-15, EN 60079-31

Water/Oil Resistant LED Work Light

- Explosion-safe for gas and dust
- Suitable for Zone 2 and Zone 22
- CE compliance in accordance to ATEX
- 250mm long (2S), 350mm long (3S/3C), 650mm long (6S)
- 1200 lx (3S/3C), 2100 lx (6S)
- 24VDC, 522mA (3S/3C)
- ED color: CD 6,500K, CN 5,000K
- IP66G, IP67G, IP69K rated



- -40°C ~ +60°C
- Tempered glass lens
- Aluminum housing
- Stainless steel housing is available for 350mm long model

CLK6C-24AG-CD-EX

CLK3S-24AG-CD-EX




Dimensions

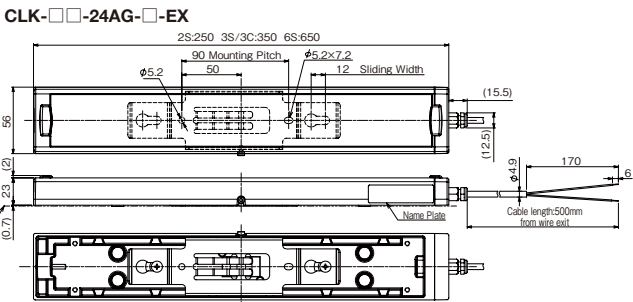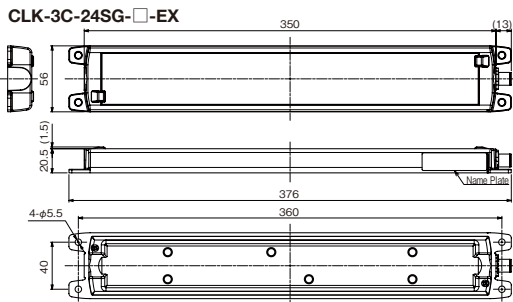

Specifications

Model	CLK- -24- -EX
LED Color	Day light(CD) / Natural White(CN)
Rated Voltage	24V DC
Operating Voltage Range	Rated Voltage ± 10%
Current Consumption	522mA ± 40mA (3S/3C type)
Light Source	High intensity LED x 18 elements (3S/3C type)
Luminous Intensity at Optical Center (lx at 1m)	1200 (3S/3C type)
Main Body	Housing: Aluminum, Cover: Tempered glass
Operating Temperature Range	-40°C~+60°C (No condensation 90%RH or less)
Mounting Direction	Any Direction (for indoor use only)
Protection Rating	IP66G/IP67G (IEC 60529)/IP69K (DIN 40050 part 9)
Vibration Resistance	19.6m/s <sup>2</sup>
Mass	1490g (3C type)

The LED Worklight may only be installed in places where risk of mechanical danger is limited to an impact energy of 2 Joules (1 Kg mass dropped at 20cm height).

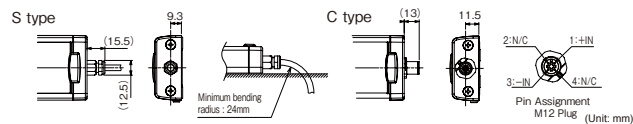

Model Code


Model	CLK- -24- -EX
Illumination Area Size	2: 200mm 3: 300mm 6: 600mm
Wiring Specifications	S: Side-exiting Cable C: M12 Cable
Color	CD: Daylight CN: Natural White
	AG: Aluminum & glass SG: Stainless steel & glass

CLA SERIES EXPLOSION-SAFE

CE ⚡ II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T135°C Dc IP65 94/9/EX(ATEX)CENELEC:EN 60079-0, EN 60079-15, EN 60079-31

- Explosion-safe for gas and dust
- Suitable for Zone 2 and Zone 22
- CE compliance in accordance to ATEX
- 100mm(140 lx), 200mm(270 lx), 300mm(400 lx), 600mm(650 lx) 900mm(810lx), 1200mm(890lx), 1500mm(945lx)
- 24VDC (polarized)
- Cable Lengs: 3m


- IP66, IP67 and IP69K rated
- -40°C ~ +60°C
- Polycarbonate Mounting brackets available

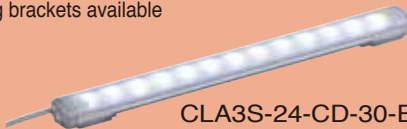

CLA3S-24-CD-30-EX



Dimensions

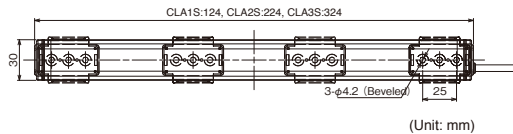

CLA S-24- -30-EX

LED color	CD Daylight 6800K CN Natural white 4800K
Length	1 100mm 6 600mm 15 1,500mm 2 200mm 9 900mm 3 300mm 12 1,200mm

Options

Rear Attachment (Magnetic Mount) Model SZ-310ARM	Side Attachment (Screw Mount) Model SZ-310AS	Side Attachment Model SZ-310ASB
--	--	---------------------------------

\*Stainless steel brackets are also available.

Specifications

Models	Luminous Color	Length	Rated Voltage	Operating Voltage Range	Rated Current Consumption	Center Radiation (lx/50cm)	Main Body Material	Operating Temperature Range	Mounting Direction	Protection Rating	Vibration Resistance	Mass
CLA1S-24-CD-EX	Daylight	100mm	DC 24V (Polarized)	DC24V±10%	104mA	140	Body: Polycarbonate	-40°C to +60°C (RH 90% or less No Condensation)	Any Direction (Indoor Use)	IP66/67/69K	19.6m/s <sup>2</sup>	80 g
CLA1S-24-CN-EX	Natural White	100mm			104mA	140						80 g
CLA2S-24-CD-EX	Daylight	200mm			208mA	270						130 g
CLA2S-24-CN-EX	Natural White	200mm			208mA	270						130 g
CLA3S-24-CD-EX	Daylight	300mm			240mA	400						180 g
CLA3S-24-CN-EX	Natural White	300mm			240mA	400						180 g
CLA6S-24-CD-EX	Daylight	600mm			480mA	650						340 g
CLA6S-24-CN-EX	Natural White	600mm			480mA	650						340 g
CLA9S-24-CD-EX	Daylight	900mm			720mA	810						500 g
CLA9S-24-CN-EX	Natural White	900mm			720mA	810						500 g
CLA12S-24-CD-EX	Daylight	1,200mm			960mA	890						660 g
CLA12S-24-CN-EX	Natural White	1,200mm			960mA	890						660 g
CLA15S-24-CD-EX	Daylight	1,500mm			1,200mA	945						820 g
CLA15S-24-CN-EX	Natural White	1,500mm			1,200mA	945						820 g



# RES-A Heavy Duty Revolving Warning Light for Harsh Environment


## Robust Heavy Duty Revolving Warning Light

- $\phi 224\text{mm}$  diameter.
- Integral Rotating Parabolic Reflector: For enhanced visibility from a distance.
- Installation: Indoors—upright, inverted, sideways; Outdoors—upright only.
- Main Body: Aluminum alloy die-cast with silver color baked finish.
- Dome: Acrylic resin covered with clear hard-glass, and metal guard.
- Available Colors: Red, Amber, Green and Blue.
- IP66
- The metal cable gland is an optional part. Needs to order separately.




The metal cable gland is only available as an option. Please order it separately.

## ■ Dimensions

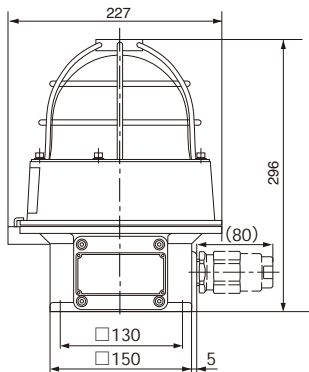

Mounting Dimension



(mm)

## ■ RES-A Type

Model	Rated Voltage	Current	Rotations per Minute	Bulb	No.	Mass
⊙ RES-12A	12V DC	0.9A	170	12V10W	9	6.5kg
⊙ RES-24A	24V DC	0.5A		24V10W	10	
⊙ RES-48A	48V DC	0.3A		150	48V10W	
RES-100A	100~110V AC	0.1A	170	12V5W	12	
⊙ RES-120A	115~120V AC					
RES-220A	200~220V AC	0.05A				
⊙ RES-240A	230~240V AC					

Bulb...G18 BA15S

⊙: Special Order



TIIS is a non-governmental, non-profit and self-sustaining organization founded in Japan in 1965 and recognized by the Minister of Health, Labor and Welfare as a juridical incorporation, to help reduce industrial accidents and contribute towards the benefits of industrial sectors in Japan through its various technological activities.

# RLR Robust Heavy Duty 11.2G LED Super Bright Beacons for Harsh Environment



- 162mm diameter
- 11.2G Anti-Vibration
- IP66 Protection
- Robust Heavy-duty Design
- Dual LED with Twin Reflector
- Maintenance-free with Brushless Motor
- Strong Polycarbonate Housing
- CE Compliant (12/24VDC)




## LED + Brushless Motor + Bearing Mechanism




## ■ Long Life

The RLR has many advantages compared to a rotating beacon with incandescent bulb and standard motor. The LEDs last approximately 20 times to 40 times longer than an incandescent bulb. The combination of the brushless motor and bearing mechanism allows the RLR to operate from 8,000 hrs to 10,000 hrs, compared to 5,000 hrs for other rotating beacons.

## Structure of conventional motor



## Structure of Brushless motor



Vibration Resistance




High Visibility



High Protection

## ■ Dimensions

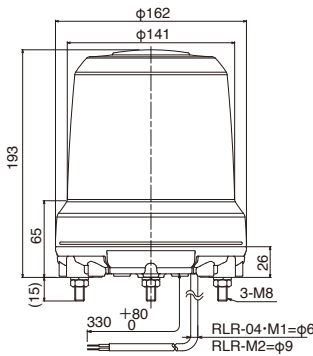

## ■ Model Code

### RLR-04-P-R

#### Rated Voltage

04 : 48V DC  
M1 : 12/24V DC  
M2 : 90V AC~250V AC

#### Color



R : Red G : Green  
Y : Amber B : Blue

#### Mounting Dimensions

Blank :  $\phi 140$   
P :  $\phi 120$

## ■ Specification

Model	Rated Voltage	Operating Voltage Range	Vibration Resistance	Operating Temperature Range	Dome	Mass
RLR-M1	12/24V DC	9.5~15V DC	110m/s <sup>2</sup> (11G)	-30°C~+70°C	-R (Red) -Y (Amber) -G (Green) -B (Blue)	1.0kg
RLR-04	48V DC	20~30V DC	110m/s <sup>2</sup> (11G)	-30°C~+70°C	-R (Red) -Y (Amber) -G (Green) -B (Blue)	1.0kg
RLR-M2	90~250V AC	90~250V AC	45m/s <sup>2</sup> (4.5G)	-10°C~+50°C	-R (Red) -Y (Amber) -G (Green) -B (Blue)	1.06kg

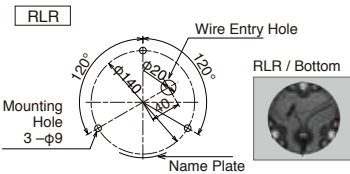

Passenger Car



Construction Machinery



Emergency Vehicle



Dump Truck